

## REMOTE SWITCH KIT

## SECTION 1

INSTALLATION INSTRUCTIONS

**⚠ WARNING:** This kit is intended to be used **ONLY** with designated attachments such as the grinder/shredder, sprayer or vacuum attachment. Using this switch will permit the P.T.O. to be engaged without the operator being in the tractor operating position. The P.T.O. interlock switch must be reconnected when the above attachments are removed to maintain the warranty and safety control system. Failure to reconnect the P.T.O. interlock switch could result in serious personal injury.

1. Clamp the plate to the frame of the attachment in the location where the switch is to be mounted. Use a transfer punch to mark the hole locations. Unclamp the plate and drill two .343 diameter holes.
2. Fasten the plate to the attachment frame with the two 5/16-18 hex bolts and lock nuts.
3. Snap the switch into the slot on the plate. Connect the two wires of the wiring harness to the posts on the switch.
4. Unplug the connector from the P.T.O. interlock switch and plug it into the connector on the end of the switch kit wiring harness.


**NOTE:** Reconnect the P.T.O. interlock switch connector to the P.T.O. interlock switch before moving the tractor or installing another attachment.

5. Tape or tie the wiring harness to the attachment frame.

DESCRIPTION	QTY.	PART NO.	ITEM NO.
Switch, Light	1	46034	1
Plate, Silkscreen	1	46033	2
Harness, Wiring	1	46032	3
Bolt, Hex 5/16-18x1.00	2	180729	4
Nut, Lock 5/16-18	2	41855	5
The Cable	6	10029	6

## SECTION 2

### ILLUSTRATED PARTS AND PARTS LIST

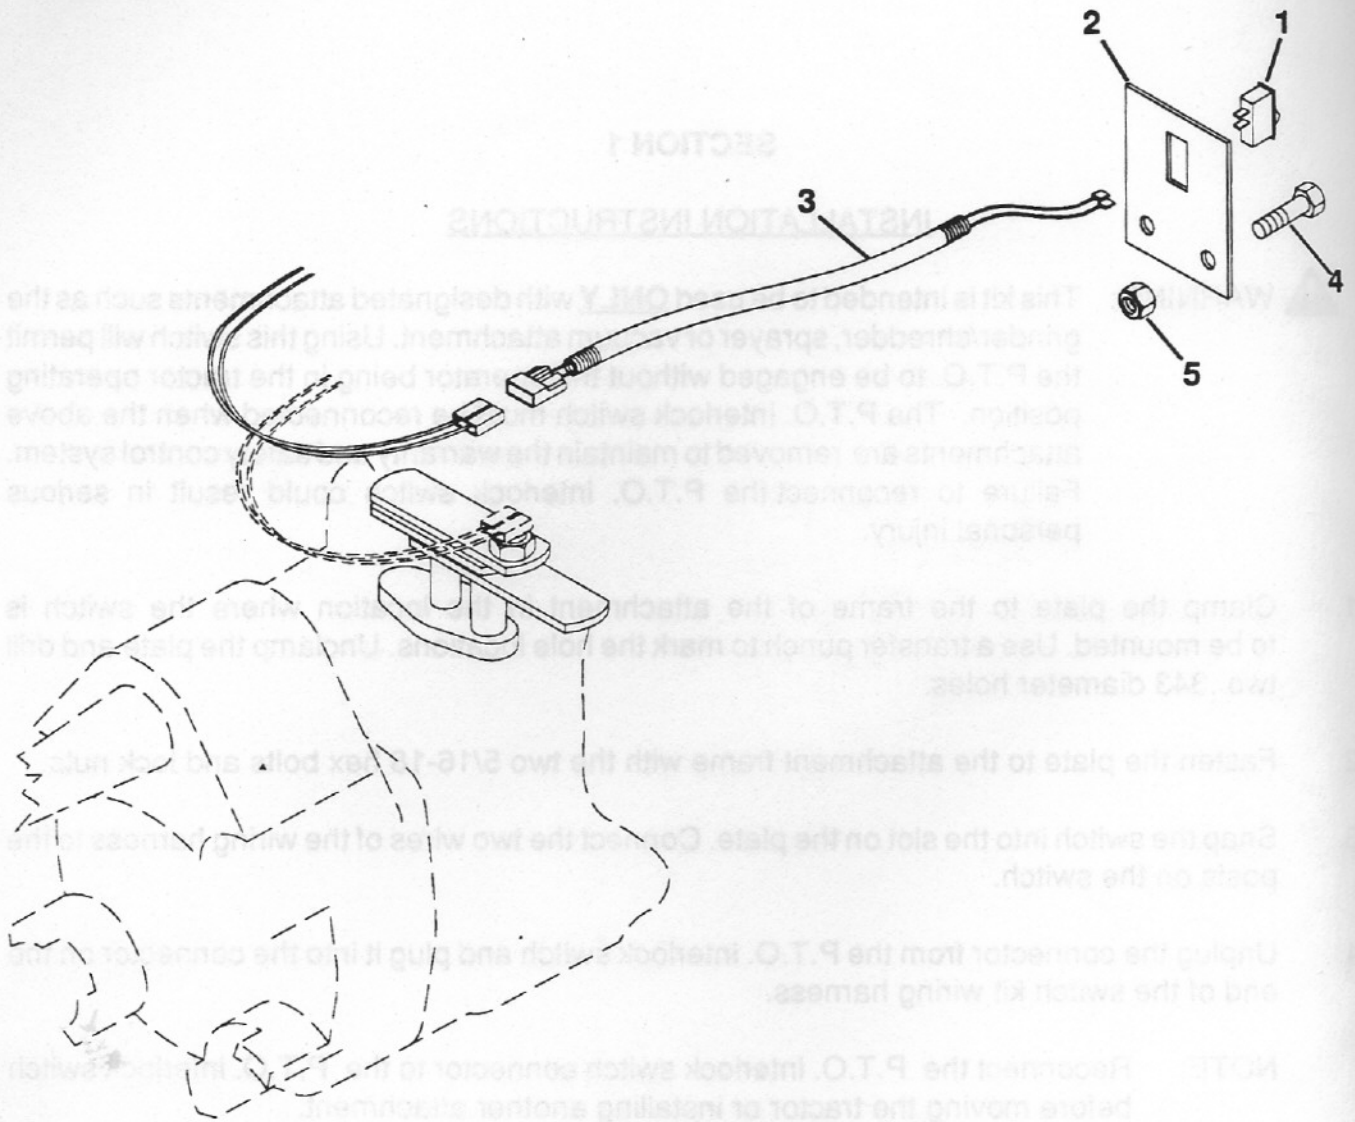

ITEM NO.	PART NO.	QTY.	DESCRIPTION
1	46060	1	Switch, Light
2	46059	1	Plate, Silkscreen
3	46069	1	Harness, Wiring
4	180079	2	Bolt, Hex 5/16-18x1.00
5	419455	2	Nut, Lock 5/16-18
NS	10629	6	Tie, Cable